

PEG on desalination -AJCHE

by Anwar Ma'ruf

Submission date: 08-Oct-2020 03:51PM (UTC+0700)

Submission ID: 1408913860

File name: 03_American_Journal_of_Chem_Eng_-_PEG_desalination.pdf (232.23K)

Word count: 2148

Character count: 11797

The Effect of Polyethylene Glycol (PEG) on the Performance of Natural Zeolite-PVA Hybrid Ceramic Membrane for Desalination

Anwar Ma'ruf^{1,*}, Moechammad Agus Salim Al Fathoni², Agus Mulyadi Purnawanto³, Linatul Chulqi¹

¹Chemical Engineering Department, Faculty of Engineering and Science, Universitas Muhammadiyah Purwokerto, Purwokerto, Indonesia

²Civil Engineering Department, Faculty of Engineering and Science, Universitas Muhammadiyah Purwokerto, Purwokerto, Indonesia

³Agrotechnology Department, Faculty of Agriculture, Universitas Muhammadiyah Purwokerto, Purwokerto, Indonesia

Email address:

anwarump@yahoo.com (A. Ma'ruf), agus@gtsshop.com (M. A. S. Al Fathoni), agoesmp@gmail.com (A. M. Purnawanto),

clinatul@yahoo.com (L. Chulqi)

*Corresponding author

To cite this article:

Anwar Ma'ruf, Moechammad Agus Salim Al Fathoni, Agus Mulyadi Purnawanto, Linatul Chulqi. The Effect of Polyethylene Glycol (PEG) on the Performance of Natural Zeolite-PVA Hybrid Ceramic Membrane for Desalination. *American Journal of Chemical Engineering*. Vol. 8, No. 1, 2020, pp. 1-4. doi: 10.11648/j.ajche.20200801.11

Received: January 30, 2020; Accepted: February 17, 2020; Published: February 25, 2020

Abstract: The seawater desalination process currently uses membrane technology because of relatively lower investment and energy requirements. The process of seawater desalination using membrane process technology can be done in 3 methods, namely reverse osmosis (RO), distillation membrane (membrane distillation / MD) and pervaporation process (PV). This study will examine the performance of a hybrid membrane developed from natural zeolite-TiO₂ with polyvinyl alcohol (PVA) in addition to polyethylene glycol (PEG) for desalination of seawater. The addition of PEG to the PVA polymer solution (dope) will increase the membrane resistance (R_m) and seawater rejection. The higher rejection is achieved of 93.77% at the addition of 6% PEG. Fouling resistance (R_f) isn't affected by PEG concentration. The fouling resistance has good linearity and stability at the addition of 6% PEG.

Keywords: Hybride Membrane, Desalination, Natural Zeolite

1. Introduction

The process of seawater distillation for industry usually uses multistage flash evaporators (MSF) or multi-effect distillation (MED). This method is not suitable for small industries or for household-scale because it requires large investment and energy. The seawater desalination process currently uses membrane technology because of relatively lower investment and energy requirements. The process of seawater desalination using membrane process technology can be done in 3 methods, namely reverse osmosis (RO), membrane distillation (MD) and pervaporation process (PV) [1].

Membranes used in the desalination process generally use the polymer membranes. However, this membrane has disadvantages such as low flux, low thermal and chemical

stability. To improve polymer membranes, the hybrid membranes can be used, namely a mixture of polymer and non-polymer. One of the non-polymer membranes is a ceramic membrane. The ceramic membranes are porous, because of that, for the desalination process, the ceramics only as of the support membranes. The hybrid membrane can be achieved by the dip-coating process of the ceramics support membrane by using a polymer solution. The use of this composite membrane aims to increase membrane flux, thermal stability, and chemical stability.

There were several researchers that use or produce hybrid membranes or ceramic composite membranes for any purpose. Gongping et al.[2] produced a hybrid membrane from ceramic support with several polymers such as hydrophobic polydimethylsiloxane (PDMS) and hydrophilic poly (vinyl alcohol) (PVA), chitosan (CS) and

polyelectrolytes for pervaporation process. Biron *et al.* [3] produced a hybrid membrane from polyamide 66 (PA66) deposited by dip coating on the inner surface of α -alumina-based (Al_2O_3) micro-porous tube for ultrafiltration of protein. Jeong *et al.* [4, 5] produce pyrophyllite-alumina composite ceramic membranes for treating of municipal wastewater.

The hybrid ceramic membranes or ceramic composite membranes can be used for desalination process [6 - 9]. The main problems in the membrane separation process are productivity and purity. The productivity of membrane process will decrease due to fouling of the membrane [10, 11]. This study will examine the performance of a hybrid membrane developed from natural zeolite-TiO₂ with polyvinyl alcohol (PVA) in addition to polyethylene glycol (PEG) for desalination of seawater.

2. Materials and Methods

2.1. Materials

Natural zeolite and starch were purchased from the local market at Purwokerto, Indonesia. Polyvinyl alcohol (PVA) and citric acid were obtained from Merck. PEG 400 was obtained from Bratachem, Indonesia.

2.2. Ceramic Membrane Development

The development of ceramic membrane support was conducted by the methods as previous work [12].

2.3. Hybrid Membrane Development

The composite membrane was developed by the dip-coating process. PVA polymer and citric acid (crosslinker) were dissolved in the water and then homogenized and heated by an ultrasound bath at 60°C for 30 minutes. The PEG was added to the dope solution at various concentrations (0, 2%, 4%, 6%). Ceramic membrane support was dip-coated at the polymer solution for 24 hours. The hybrid ceramic membrane was drying at 60°C for 6 hours and then at 120°C for 2 hours [13].

2.4. Desalination Set up

The desalination process was done by cross-flow proses (Figure 1). Seawater was filled in the feed tank. Then pumped to the flat sheet of hybrid ceramic membrane at the constant pressure. The permeate was collected and weighed periodically. The retentate was recycled to the feed tank.

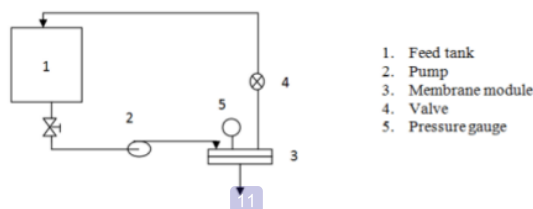


Figure 1. Experimental set-up.

3. Results and Discussion

3.1. Effect of PEG Concentration on Membrane Resistance (R_m)

Membrane resistance is defined as the function flux of clean water during filtration. The permeate flux through a membrane is often described as the applied transmembrane pressure driving force, TMP, divided by the resistance to mass transfer, R, and the permeate viscosity. For pure water filtration, R will represent the resistance to mass transfer associated with the clean membrane [14]. Mathematically can be written as:

$$J_o = \frac{TMP}{\mu \cdot R_m} \quad (1)$$

Where J_o is the flux of clean water ($\text{m}^3/\text{m}^2 \cdot \text{s}$), TMP is transmembrane pressure (Pa), μ is the viscosity of clean water (Pa · s) and R_m is membrane resistance (m^{-1}).

Figure 2 shows the effect of the PEG concentration on the membrane resistances. The value of hybrid membrane natural zeolite - PVA is $5.20 \times 10^{12} \text{ m}^{-1}$. Biron *et al.* [3] reported the ceramic support developed from α -alumina showed the membrane resistance of $0.83 \times 10^{13} \text{ m}^{-1}$. The addition of PEG on the polymer concentration will increase the value of membrane resistance. The value of hybrid membrane are $1.42 \times 10^{13} \text{ m}^{-1}$, $1.56 \times 10^{13} \text{ m}^{-1}$, and $1.95 \times 10^{13} \text{ m}^{-1}$ in addition of 2, 4, 6% PEG respectively. Biron *et al.* [3] also reported that the hybrid membrane of α -alumina - PA 66 had the value of membrane resistance of $2.85 \times 10^{13} \text{ m}^{-1}$.

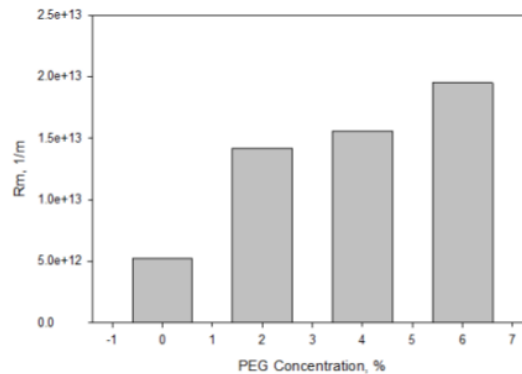


Figure 2. The value of membrane resistance at the various PEG concentrations.

3.2. Effect of PEG Concentration on Membrane Flux and Rejection

Figure 3 shows the flux of seawater during the reverse osmosis process. The flux of seawater is decreasing with the increase of PEG concentration. Figure 4 shows the rejection of seawater during the reverse osmosis process. The higher PEG concentration results in a higher rejection. Without the addition of PEG, the rejection of the natural zeolite-PVA hybrid ceramic membrane is only 63.16%. The maximum

rejection is achieved of 93.77% at the PEG concentration of 6%. Kujawa et al. [9] reported that rejection of seawater achieved 98% by using TiO₂ and Al₂O₃ membrane modification with alkylsilanes. Xie et al. [7] reported that at the utilization of a hybrid membrane from polyvinyl alcohol/maleic acid/tetraethyl orthosilicate (PVA/MA/TEOS) for pervaporation process of seawater, the salt (NaCl) rejection of the membrane achieved 99%. This was mainly due to the non-volatile nature of the NaCl compound and hydrophilic nature of the hybrid PVA/MA/TEOS membrane. In PV separation of aqueous salt solution, water molecules preferentially diffuse and permeate into the membrane. Al Mayyahi and Deng [15] reported that the rejection of NaCl achieved 98% at the desalination process using photo-responsive ZnO polyamide thin film nanocomposite membrane.

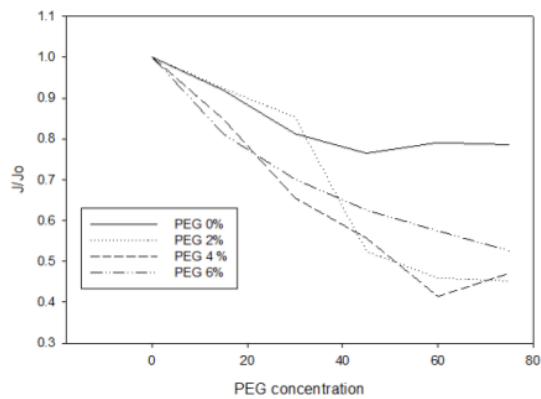


Figure 3. The flux of desalination of seawater at the various PEG concentrations.

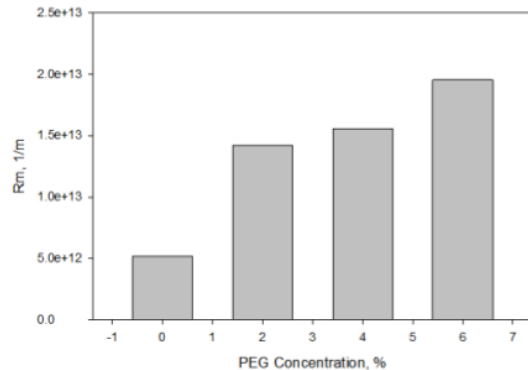


Figure 4. Rejection of seawater at the various PEG concentrations.

3.3. Effect of PEG Concentration on Fouling Resistance (R_f)

The permeate flux through a membrane during the filtration process is described as the applied transmembrane pressure driving force, TMP, divided by the total resistance to mass transfer, R_t, and the permeate viscosity. Mathematically

can be written as:

$$J = \frac{TMP}{\mu \cdot R_t} \quad (2)$$

Where R_t is the sum of R_m + R_f. R_f can be determined by the equation:

$$R_f = R_t - R_m \quad (3)$$

Figure 5 shows the fouling resistance (R_f) during the desalination of seawater at the various PEG concentrations. The figure shows that the fouling resistance of the membrane with 6% PEG has good linearity and stability. While the fouling resistance of the membrane with 2% and 4% PEG are poor of linearity and stability. The fouling resistance increases significantly after 30 minutes. The linearity of membranes is shown in Table 1. The figure shows that at the time of 75 minutes, the fouling resistance at various PEG concentrations achieved the same value of 1.7 × 10¹³ m⁻¹.

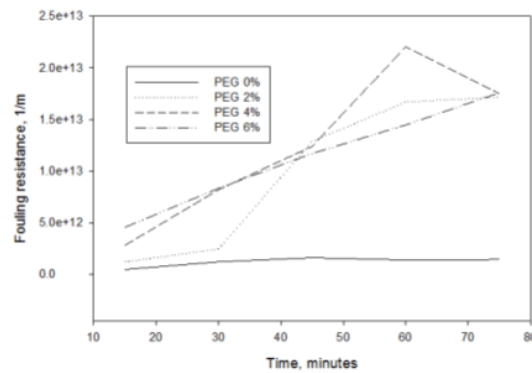


Figure 5. The fouling resistance during desalination at the various PEG concentrations.

Table 1. Linearity equation of fouling resistance.

PEG Concentration	Equation	R ²
0	y = 1.10 ¹⁰ x + 6.10 ¹¹	0.5575
2	y = 3.10 ¹¹ x - 4.10 ¹²	0.8933
4	y = 3.10 ¹¹ x - 4.10 ¹¹	0.8174
6	y = 2.10 ¹¹ x + 2.10 ¹²	0.9967

4. Conclusion

The addition of PEG to the PVA polymer solution (dope) will increase the membrane resistance (R_m) and seawater rejection. The higher rejection is achieved of 93.77% at the addition of 6% PEG. Fouling resistance (R_f) isn't affected by PEG concentration. The fouling resistance has good linearity and stability at the addition of 6% PEG. The characteristics of hybrid ceramic membrane form natural zeolite – PVA/PEG must be modified to increase the flux and rejection coefficient.

Acknowledgements

The authors acknowledge to Ministry of Research

10

Technology and Higher Education of Indonesia for funding this research.

References

- [1] M. Elma, C. Yacou, D. K. Wang, S. Smart, and J. C. Diniz, "Microporous Silica Based Membranes for Desalination," *Water*, vol. 4, pp. 629–649, 2012.
- [2] G. Liu, W. Wei, W. Jin, and N. Xu, "Polymer/ceramic composite membranes and their application in pervaporation process," *Chinese J. Chem. Eng.*, vol. 20, no. 1, pp. 62–70, 2012.
- [3] D. da S. Biron, P. Poletto, J. Duarte, M. Zeni, C. Perez, and V. dos Santos, "Preparation and Characterization of PA66/Alumina Composite Membrane Dionisio," *Mater. Res.*, vol. 18, no. 4, pp. 748–755, 2015.
- [4] Y. Jeong, S. Lee, S. Hong, and C. Park, "Preparation, characterization and application of low-cost pyrophyllite-alumina composite ceramic membranes for treating low-strength domestic wastewater," *J. Memb. Sci.*, vol. 536, pp. 108–115, 2017.
- [5] Y. Jeong, Y. Kim, Y. Jin, S. Hong, and C. Park, "Comparison of filtration and treatment performance between polymeric and ceramic membranes in anaerobic membrane bioreactor treatment of domestic wastewater," *Sep. Purif. Technol.*, vol. 199, pp. 182–188, 2018.
- [6] P. S. Goh and A. F. Ismail, "A review on inorganic membranes for desalination and wastewater treatment," *Desalination*, vol. 434, pp. 130 – 155, 2018.
- [7] Z. Xie, D. Ng, M. Hoang, and J. Zhang, "Study of Hybrid PVA / MA / TEOS Pervaporation Membrane and Evaluation of Energy Requirement for Desalination by Pervaporation," *Environ. Res. Public Heal.*, vol. 15, no. 1913, pp. 1–18, 2018.
- [8] S. Tao, Y. Xu, J. Gu, H. Abadikhah, J. Wang, and X. Xu, "Preparation of high-efficiency ceramic planar membrane and its application for water desalination," *J. Adv. Ceram.*, vol. 7, no. 2, pp. 117–123, 2018.
- [9] J. Kujawa, S. Cerneaux, W. Kujawski, and K. Knozowska, "Hydrophobic Ceramic Membranes for Water Desalination," *Appl. Sci.*, vol. 7, pp. 1–11, 2017.
- [10] A. Ruiz-Garcia, N. Melian-Mantel, and I. Nuez, "Short Review on Predicting Fouling in RO Desalination," *Membranes (Basel)*, vol. 7, no. 62, pp. 1–17, 2017.
- [11] P. S. Goh, W. J. Lau, M. H. D. Othman, and A. F. Ismail, "Membrane fouling in desalination and its mitigation strategies," *Desalination*, vol. 425, no. October, pp. 130–155, 2018.
- [12] A. Ma'Ruf and M. A. S. Al Fathoni, "Development of porous ceramic membrane from natural zeolite - Clay for microfiltration," *IOP Conf. Ser. Mater. Sci. Eng.*, vol. 403, no. 1, pp. 0–5, 2018.
- [13] A. Ma'ruf, A. S. Al Fathoni, A. M. Purnawanto, and R. A. Kusumajati, "Development of Hybrid Membrane from Clay / TiO₂ -PVA for Batik Wastewater Treatment," *Nat. Environ. Pollut. Technol.*, vol. 18, no. 4, pp. 1249–1255, 2019.
- [14] D. J. Miller, S. Kasemset, D. R. Paul, and B. D. Freeman, "Comparison of membrane fouling at constant flux and constant transmembrane pressure conditions," *J. Memb. Sci.*, vol. 454, pp. 505–515, 2014.
- [15] A. Al Mayyahi and B. Deng, "Efficient water desalination using photo-responsive ZnO polyamide thin film nanocomposite membrane," *Env. Chem. Let.*, vol. 16, no. 4, pp. 1469–1475, 2018.

PEG on desalination -AJCHE

ORIGINALITY REPORT

17%

SIMILARITY INDEX

15%

INTERNET SOURCES

13%

PUBLICATIONS

5%

STUDENT PAPERS

PRIMARY SOURCES

1	www.stc-clips.org Internet Source	4%
2	orcid.org Internet Source	3%
3	article.ijcoms.org Internet Source	2%
4	Mads Koustrup Jørgensen, Elmira Kujundzic, Alan R. Greenberg. "Effect of pressure on fouling of microfiltration membranes by activated sludge", <i>Desalination and Water Treatment</i> , 2015 Publication	1%
5	Guang Yang, Zongli Xie, Marlene Cran, Chunrui Wu, Stephen Gray. "Dimensional Nanofillers in Mixed Matrix Membranes for Pervaporation Separations: A Review", <i>Membranes</i> , 2020 Publication	1%
6	so01.tci-thaijo.org Internet Source	1%

7 Nesa Rafia, Masoud Majidi Beiragh, Ali Akbar Babaluo. "Concentration Polarization in Silica Membranes", Elsevier BV, 2017 1%

Publication

8 lume.ufrgs.br 1%

Internet Source

9 Yen Khai Chai, How Chun Lam, Chai Hoon Koo, Woei Jye Lau, Soon Onn Lai, Ahmad Fauzi Ismail. "Performance evaluation of polyamide nanofiltration membranes for phosphorous removal process and their stability against strong acid/alkali solution", Chinese Journal of Chemical Engineering, 2018 1%

Publication

10 repository.usd.ac.id 1%

Internet Source

11 link.springer.com 1%

Internet Source

12 www.cjche.com.cn 1%

Internet Source

Exclude quotes On

Exclude matches < 1%

Exclude bibliography On

PEG on desalination -AJCHE

GRADEMARK REPORT

FINAL GRADE

/0

GENERAL COMMENTS

Instructor

PAGE 1

PAGE 2

PAGE 3

PAGE 4
